


E-Flo[®]


Electric Circulating Pumps

Technical Specifications

Pump	E-Flo 1500	E-Flo 2000	E-Flo 3000	E-Flo 4000
Max Fluid Pressure	500 psi (34.5 bar)	460 psi (32 bar)	330 psi (23 bar)	250 psi (17 bar)
Flow at 20 cpm	8.1 gpm (31 lpm)	12 gpm (45 lpm)	16.2 gpm (61 lpm)	22.6 gpm (85.5 lpm)
Volume per Cycle	52 oz (1537 cc)	76.5 oz (2263 cc)	105 oz (3070 cc)	144.6 oz (4278 cc)
Inlet/Outlet	1-1/2 inch Tri-Clamp	2 inch Tri-Clamp	2 inch Tri-Clamp	2 inch Tri-Clamp
Weight	460 lb (209 kg)	516 lb (234 kg)	540 lb (245 kg)	550 lb (250 kg)

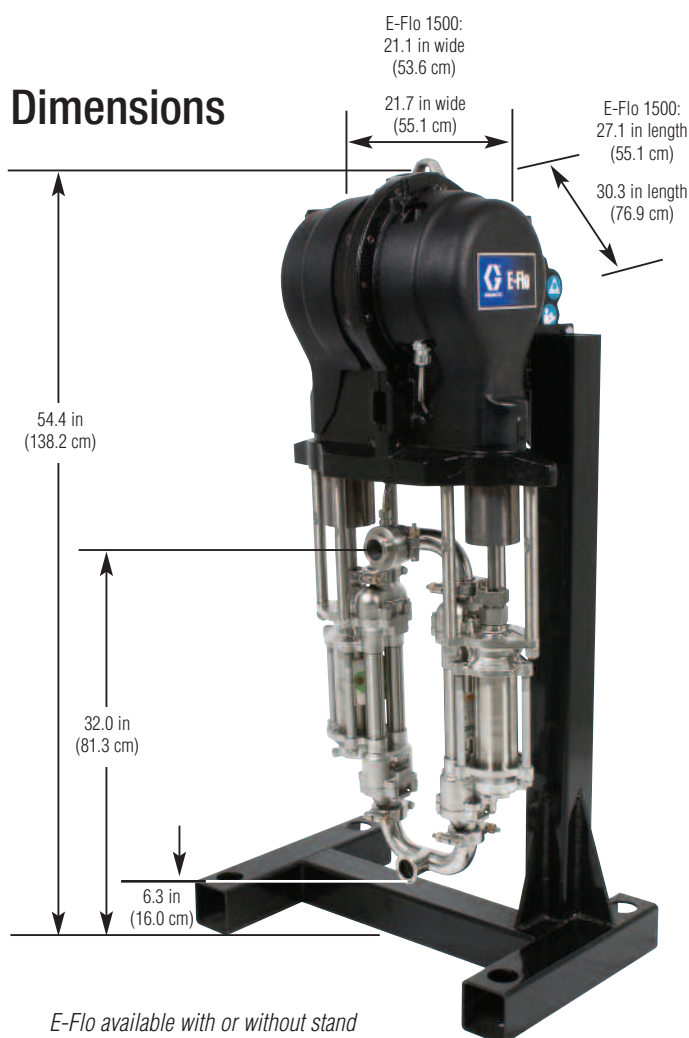

Ordering Information



Power	Style	Motor	Sensor Circuit	Lower Size	Stand
E = Electric	P = Pump	0 = No Motor 1 = 230/400V ATEX (5 HP) 2 = 230/460V (5 HP) 3 = 230/400V ATEX (2 HP) 4 = 230/460V (2 HP)	0 = No Sensor Circuit 1 = Installed	1 = 1000 cc Chromex™ 2 = 1500 cc Chromex 3 = 2000 cc Chromex 4 = 1000 cc Maxlife® 5 = 1500 cc Maxlife 6 = 2000 cc Maxlife 7 = 750 cc Chromex	0 = No Stand 1 = Installed

Standard Kits	E-Flo 1500	E-Flo 2000	E-Flo 3000	E-Flo 4000
UHMWPE piston seal kit	289548	277360	277362	277358
UHMWPE/Leather throat seal kit	277357	277357	277357	277357
Chromex piston rod	15H280	15H280	15H280	15H280
Maxlife piston rod	15H589	15H589	15H589	15H589
Chrome cylinder	183049	183047	183048	15G882
Maxlife cylinder	–	15H452	15H453	15H451
Lowert				
Stainless Steel Chromex	289366	253520	253521	253522
Stainless Steel Maxlife	–	253523	253524	253525
Manifold Assembly				
Stainless Steel Chromex	289553	15J747	15J748	15J749
Stainless Steel Maxlife	–	15J750	15J751	15J752
Optional Kits				
PTFE Piston Seal Kit	289549	277361	277363	277359
PTFE Throat Seal Kit	239866	239866	239866	239866
Leather throat seal kit	277356	277356	277356	277356

Accessories

15H884	Floor Stand Durable floor stand to mount pump including mounting hardware	15J423	Inlet/Outlet Fitting for 2" Tri-Clamp to 2" NPT
15J753	200/240 V Graco Programmed VFD kit Kit includes programmed VFD, braking resistors, AppsLite module	15J639	Inlet/Outlet Fitting for 2" Tri-Clamp to 1-1/2" Tri-Clamp
15J754	380/480 V Graco Programmed VFD kit Kit includes programmed VFD, braking resistors, AppsLite module	15J422	Inlet/Outlet Fitting for 1-1/2" Tri-Clamp to 1-1/2" NPT
208997	Mechanical Back Pressure Regulator	15J755	Sensor Circuit Kit
120373	Local I/O Box Local explosion proof pump control box	288117	Pneumatic Back Pressure Regulator, 1-1/4" NPT
15H885	Ethernet Upgrade Kit Kit enables Ethernet connection from the Graco supplied VFD	288262	Pneumatic Back Pressure Regulator, 2" Tri-Clamp
		288311	Pneumatic Back Pressure Regulator, 1-1/2" NPT
		288414	Gear Box Lubricant, 12 pack carton

Manuals

311593	E-Flo operations manual	311596	VFD manual
311592	E-Flo installation manual	311595	Pneumatic BPR manual
311594	E-Flo repair parts manual	311606	Pneumatic BPR/VFD manual

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Call today for product information or to request a demonstration.
1.877.84GRACO (1-877-844-7226) or visit us at www.graco.com.

